

Bluemesh Sample Factory Reset

Use this if your sample won't show up in the Umi-Smart app, or it's still paired to a project whose password you don't have. A factory reset clears the receiver's pairing so you can set it up fresh.

WHAT YOU NEED


Access to the DC power plug between the power supply and the panel.

AT A GLANCE



RESET STEPS


- 1** Plug the panel in and leave it **on for 30 seconds**.

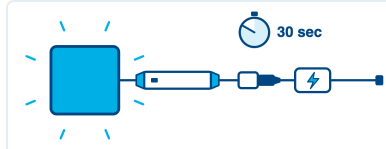

- 2** **Unplug and plug back in, 3 times.** Each time: off for about 2 seconds, then on for about 3 seconds.




- 3** **Unplug and plug back in once,** then leave it **on for 10 seconds**.

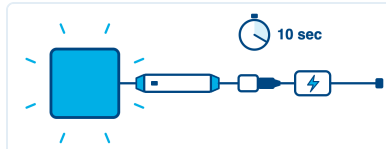

- 4** **Unplug and plug back in, 2 more times** (off about 2 seconds, on about 3 seconds).



- 5** The panel **flashes full bright white** for a few seconds, then returns to normal. That means the reset worked.

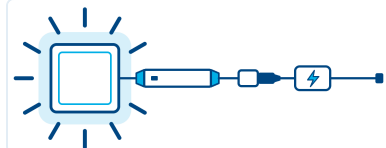

- 6** Open **Umi-Smart**, tap **Discover Nearby**, and set the sample up again as a new device (see the Bluemesh Sample Setup Guide or Quick Start).

IF IT DOESN'T RESET

- No bright-white flash? Leave the panel on for 30 seconds and start again from step 1.
- Keep each unplug short (about 2 seconds). Long gaps restart the sequence.
- Still not working? Contact EOS Light (eoslight.com).