




# ALL IN 1 LightPaper

# Color Changing RGB plus Tunable White in one LED

- · An Industry First! Color Changing PLUS Tunable White in one LED (2700K - 6000K standard)
- · Thin, lightweight, flexible, cuttable light sheets
- · Suited for shallow setback starting at 1/4"
- · For walls, ceilings, curved structures and custom shapes
- · Multiple Lumen Packages and Wattages
- · 80+CRI



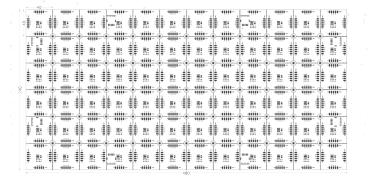



The versatility of All in 1 eos LightPaper allows use in a large number of applications:







RESIDENTIAL



**COMMERCIAL INTERIOR** 



**CUSTOM FIXTURES** 



**MILLWORK** 





LOGOS AND SIGNAGE



**COVE LIGHTING** 





**BRANDING** 



**ACCENT LIGHTING** 



**HEALTHCARE** 



# General Specifications

## FLEXIBLE TECHNOLOGY:

LightPaper is versatile, flexible and thin LED technology that can wrap around curved surfaces or be cut into custom shapes

#### PAPER SIZE:

Each sheet is 19" x 9.5" and seamlessly expandable via Molex® connectors up to 80W per driver. Can be cut at the factory or in the field into 1.57" squares.

#### SETBACK:

All in 1 LightPaper is suited for shallow setback starting at 1/4", depending on the transparency of the illuminated material; most can be evenly illuminated w/1-2" setback. We fully recommend creating a mock up prior to specifying the job. Contact your EOS agent for assistance.

#### LONG LIFE:

Over 50,000 hours = Nearly 12 years based on 12 hours a day. Once installed, LightPaper is virtually maintenance free.

#### CRI:

80+ CRI

### POWER OPTIONS:

24VDC Adapter

### DRIVER INPUT VOLTAGE:

24VDC/120V-277V Universal AC Input

#### LUMENS & WATTAGE (See page 3):

3W - 13W per sq ft 150 - 650 Lumens per sq ft

#### DIMMABLE:

LightPaper is dimmable when matched with Dimmable Power Supplies. (DMX/DALI)

#### LEDs:

ANSI Binned LEDs from Tier 1 Suppliers LED CRI > 80+

LED CRT - RGB + Tunable 2700K-6000K

#### WIRE GUAGE:

22 AWG Wire

#### DAMP LOCATION:

LightPaper is Damp Location Rated when driven with a Class 2 Power Supply

#### HOSPITAL AND MRI SAFE:

The system contains non-ferrous materials, making LightPaper safe for MRI suites. The LightPaper Power supply must be installed remotely, up to 30 feet from the application.

#### SERVICE AND INSTALLATION:

LightPaper is field serviceable, and can be precut by our production team to customer specifications.

#### LIMITED WARRANTY:

3 Years - See Website for full details.

000 000 000

13W, >650 Lumens per sq ft for signage & architecturally decorative objects



Dimmable, energy-efficient and cool-running



Lightweight, Easy-Install



Quick, easy installation in indoor applications



### **APPROVALS AND CERTIFICATIONS:**

The LightPaper System is UL listed for Architectural applications and UL recognized for signage. All power supplies are UL / ETL listed.















Molex is a registered trademark of Molex, LLC.












# **Product Specification Ordering Form**

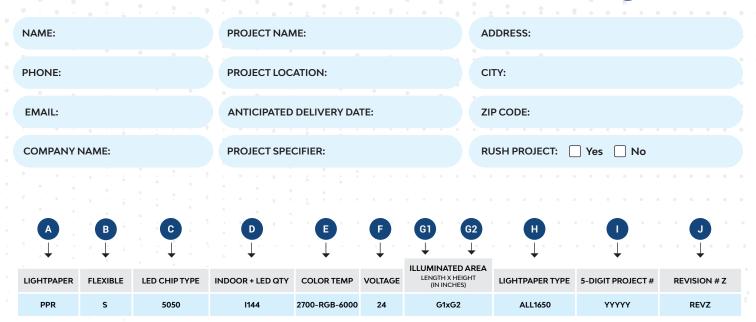

**A** MATERIAL

**PPR** -LightPaper

**B** RIGIDITY

S-Flexible

C LED CHIP TYPE

5050 - Chip Type

D LED QTY

I - Damp Location/Indoor 144 - LED Chips per Sheet **E** COLOR TEMP

2700-RGB-6000 - RGB plus Full Range tunable white from 2700K to 6000K standard

F VOLTAGE

24-24VDC (w/ UNV 120-277V Driver)

G ILLUMINATED AREA

G1 - Length in inches **G2 - Height in inches** 

ALL1 - All in 1 w/Lumen packages indicated

PROJECT #

YYYYY - 5-Digit Project #

J REVISION #

**REVZ - REVISION #Z** 









PROJECT NAME:

PROJECT LOCATION:

# Please fill out the form

Α	В	С	D	Е	F	G1 G2	Н	I	J
LIGHTPAPER	FLEXIBLE	LED CHIP TYPE	INDOOR + LED QTY	COLOR TEMP OPTIONS	VOLTAGE	ILLUMINATED AREA	LIGHTPAPER TYPE	5-DIGIT PROJECT#	REVISION #Z
PPR	S	5050	l144	2700-RGB-6000	24	G1xG2	ALL1650	YYYYY	REVZ

- 1. What is the Application the LightPaper will be used for? E.g.: Hospitality, Retail, Signage Etc.
- 2. What are the LightPaper backlighting? E.g.: Stone, Graphic, Glass, Acrylic Etc.

3. Are there any installation details to review?

4. Is there an existing Dimming or Lighting Control System? If so, please provide Representative with information of the Control system (specs, manufacturer, etc.)

Additional information:





