





DIM-TO-WARM BASIC LightPanels

BASIC Dim-to-Warm LightPanels are built for optimal design integration with a thin profile starting at 1/4" thin to provide an ultra-slim sheet of light. Low voltage LEDs are integrated with an optical grade etched acrylic to provide evenly distributed lighting. At full brightness, the color temperature is 2850 Kelvin, while it gradually shifts to 1800K as it is dimmed. 90+ CRI.

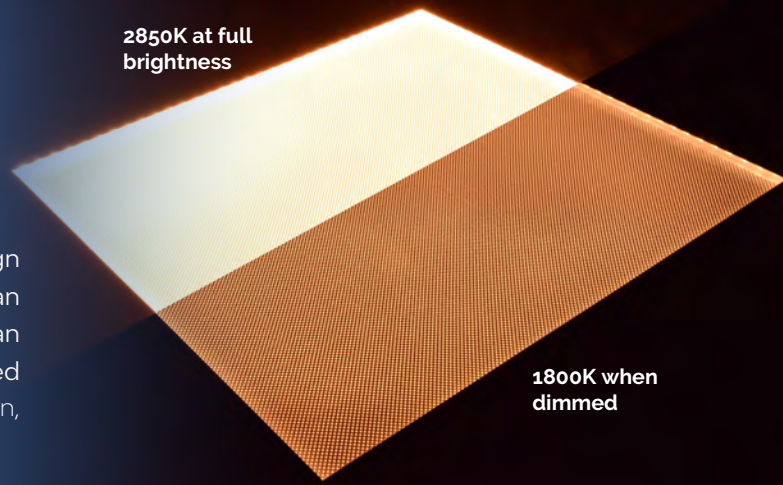

2850K at full brightness

1800K when dimmed

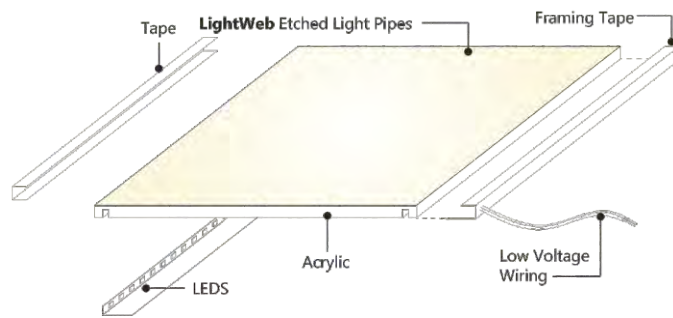

The design of BASIC Dim-to-Warm LightPanels allows use in a large number of applications:



Hospitality



Retail



Healthcare



Residential



Accent Lighting



Branding



Commercial Interior



Millwork



Cove Lighting



Task Lighting



Custom Fixtures



Logos and Signage

General Specifications

LIGHT WEB TECHNOLOGY™ :

3D etched patterns to evenly distribute light throughout the panel. Patterns available are GRID, DOT and MICRODOT™

MAXIMUM SIZE :

120" x 80" (consult with eos specialist for recommendations with oversize panels)

MINIMUM SIZE :

1" X 2" (Ideal for Cove and Accent Lighting)

THICKNESS:

1/4"-1/2"

*Thickness is determined by panel shape, size and color temperature.

LONG LIFE :

Over 50,000 hours = Nearly 12 years based on 12 hours a day. Once installed, the LightPanel System is virtually maintenance free.

POWER OPTIONS:

24VDC Standard and 24VDC High Power, 12VDC Available upon request

DRIVER INPUT VOLTAGE :

100V TO 480V

WATTAGE :

4.3 W/Ft. - 24V Standard Power (Optional: 12V)
5 W/ Ft. - 24V - High Power

DIMMABLE :

The system is dimmable to <10% when matched with Dimmable Power Supplies

LEDs :

ANSI Binned LEDs from Tier 1 Suppliers
LED CRI > 90+
LED CRT - 2850K - 1800K

WIRE GAUGE:

20GA Wiring for White and Color Tuning Panels, 24GA for Color

HOSPITAL AND MRI SAFE :

The system contains non ferrous materials, making the LightPanel safe for MRI suites. The LightPanel Power supply must be installed remotely, up to 30 feet from the application.


SERVICE AND INSTALLATION :

The LightPanel is field serviceable, typically LEDs can be replaced in the field. The LightPanel System can be predrilled by our production team with customer's specifications.

IP RATNG:

Indoor Rated

Optional Specifications




USB COMPATIBLE :

* Max. Size 40" X 40"
(wattage permitting)



COMPATIBLE POWER SUPPLIES :

- 0-10V dimming
- Electronic low voltage (ELV)
- Remote control plug-in •
Inline plug-in



COLOR TEMPERATURE :

- Dimmable between 2850K at full brightness down to 1800K when dimmed down



MULTIPLE PANEL MOUNTING OPTIONS:

- Z-Profiles • Stand Offs • Key-Hole Frames • Mirror Clips
- Aircraft Cable Mounts • Pre-Drilled holes by factory
- Panels are drillable on site* (use only eos suggested method in brochure)



APPROVALS AND CERTIFICATIONS:

The LightPanel System is UL listed for Architectural applications and UL recognized for signage. All power supplies are UL / ETL listed.

<https://eoslight.com/user-guide/>




DOWNLOAD OUR
USER GUIDE FOR WIRING &
INSTALLATION INSTRUCTIONS





Product Specification Ordering Form

NAME:	PROJECT NAME:	ADDRESS:
PHONE:	PROJECT LOCATION:	CITY:
EMAIL:	ANTICIPATED DELIVERY DATE:	ZIP CODE:
COMPANY NAME:	PROJECT SPECIFIER:	RUSH PROJECT: <input type="checkbox"/> Yes <input type="checkbox"/> No



QTY	PANEL TYPE	VOLTAGE	DIMENSIONS (INCHES) TOP SIDE		LED SIDES	COLOR TEMP	LED POWER	DIFFUSER	CORD LENGTH	CORD LOCATION	CORD COLOR	POWER SUPPLY	IF CURVED PANEL SPECIFY RADIUS (INCHES)
5	LP	24V	48	50	4SL	2850-1800	SP	DIF	CC6	TL	BC	010V	20

A PANEL TYPE

LP - BASIC

Lightpanel (use For Curved Panel As Well)

LF - FRAMED

Lightpanel With C Channel 7/16" Lightpanel
With J1 Channel 1/4" Lightpanel With J2
Channel 5/16"

CP - CRYSTAL

Lightpanel

CF - CRYSTAL FRAMED Lightpanel With C
Channel 7/16"

WP - OUTDOOR

Lightpanel - Damp Location

AM - ARCHITECTURAL MILLWORK

Lightpanel

AU - AURA

Lightpanel

B VOLTAGE

24V - 24V (Standard)

12V - 12V (Optional)

C DIMENSIONS


(Generated by Client)

C1- Top Dimension

C2- Side Dimension

*For custom shapes, please provide:

- Longest Outside Dimensions
- Drawing

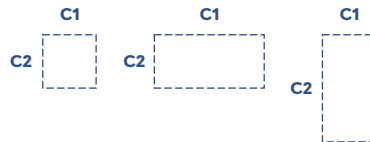

D LED SIDES


1SL - One Side

2SL - Two Sides

3SL - Three Sides

4SL - Four Sides

Top Dimension

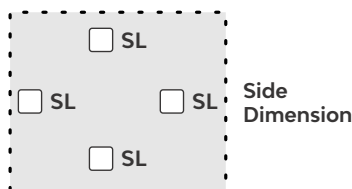

*Please note, the longest length is typically the LED side when selecting 1SL or 2SL

E COLOR TEMP

2850-1800 - Warm Dimming
from 2850K to 1800K

F LED POWER

SP- Standard Power


G OPTIONAL 2MM DIFFUSION OPAL

YES - DIF **NO** - ND

H POWER CORD LENGTH

SC - Standard -9.8 ft.

CC_ - Custom Length ____ ft



I POWER CORD EXIT

TL - Top Left Corner

BL - Bottom Left Corner

TR - Top Right Corner

BR - Bottom Right Corner

STL - Side Top Left Corner

SBL - Side Bottom Left Corner

STR - Side Top Right Corner

SBR - Side Bottom Right Corner

J POWER CORD COLOR

BC - Black **WC** - White

K POWER SUPPLY INFO

010V - 010V Dimmable Hardwire

ELV - Electronic Low Voltage
Dimmable Hardwire

PI - Plug In, DC Jack

DPI - Dimmable Plug in w/ remote



PROJECT NAME:

PROJECT LOCATION:

Please fill out the form

ITEM	QTY	A	B	C1	C2	D	E	F	G	H	I	J	K	L
ITEM	QTY	PANEL TYPE	VOLTAGE	DIMENSIONS TOP SIDE		LED SIDES	COLOR TEMP	LED POWER	DIFFUSER	CORD LENGTH	CORD LOCATION	CORD COLOR	POWER SUPPLY	IF CURVED PANEL SPECIFY RADIUS(INCHES)
1	5	LP	24V	48	50	4SL	2850-1800	SP	DIF	CC6	TL	BC	010V	20

1. What is the Application the panels will be used for?
 E.g.: Hospitality, Retail, Signage Etc.

2. What are the LightPanels backlighting?
 E.g.: Stone, Graphic, Glass, Acrylic Etc.

3. Will the LightPanels be installed adjacent to one another?
 Yes No
 If Yes, Please Provide Drawing of Panel Layout

4. Will the LightPanels be powered individually (1:1) or would you like to connect Multiple LightPanels to a single driver?

5. Are there any installation details to review?

5. Is there an existing Dimming or Lighting Control System?
 If so, please provide Representative with information of the Control system (specs, manufacturer, etc.)

Additional information: