


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.07V I:1.846A P:44.42W PF:1.000 Lamp Flux:2415.63x1 lm		
NAME: LP-24-48x24-SP	TYPE:Basic LightPanel	WEIGHT:
SPEC.:FLS-1W4-3000K	DIM.: 48*24	SERIAL No.:01
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 46.40 lm/W			
MODEL	33.1212	Imax(cd)	575.6	S/MH(C0/180)	1.42
NOMINAL POWER(W)	44.4223	LOR(%)	85.3	S/MH(C90/270)	1.47
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	2061.2	η UP,DN(C0-180)	0.0,39.2
NOMINAL FLUX(lm)	2415.63	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,46.2
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	24	η down(%)	85.3	CIBSE SHR MAX	1.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

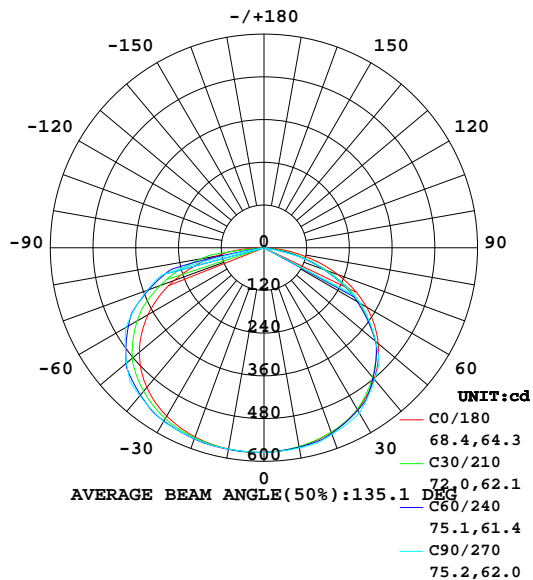

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

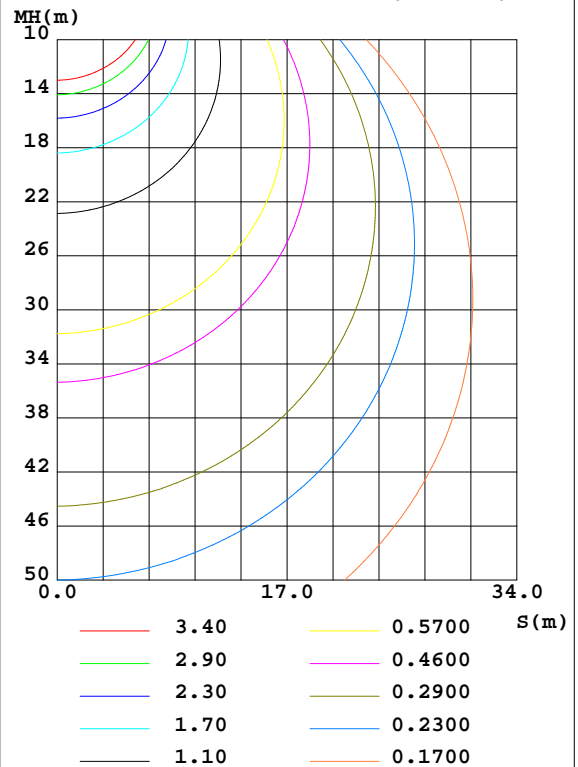

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:06 November 2024

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:5.640m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	$\%lum, lamp$
5	572.4	571.9	573.0	574.1	575.6	575.3	574.6	573.1	0- 5	13.73	13.73	0.67,0.57
10	568.2	567.5	570.9	572.1	574.1	574.7	574.3	570.2	5- 10	40.96	54.69	2.65,2.26
15	560.9	561.9	568.9	569.1	571.1	573.3	573.9	566.1	10- 15	67.58	122.3	5.93,5.06
20	552.0	554.9	558.0	564.8	565.8	571.1	570.6	561.6	15- 20	93.12	215.4	10.4,8.92
25	540.0	540.5	547.2	552.9	557.4	565.5	567.4	553.2	20- 25	116.9	332.3	16.1,13.8
30	524.5	522.9	536.3	538.3	546.2	557.5	564.1	542.8	25- 30	138.5	470.8	22.8,19.5
35	505.3	503.2	510.0	521.5	531.4	548.1	553.3	531.2	30- 35	157.2	628.0	30.5,26
40	481.7	479.5	483.7	500.7	511.8	535.9	542.5	516.4	35- 40	172.0	800.0	38.8,33.1
45	453.1	442.8	457.4	467.1	487.7	516.0	531.7	492.9	40- 45	182.6	982.6	47.7,40.7
50	418.9	403.6	409.6	430.6	456.8	493.8	503.8	467.4	45- 50	188.1	1171	56.8,48.5
55	378.8	361.6	361.7	390.5	419.6	468.6	476.0	439.1	50- 55	186.8	1357	65.9,56.2
60	332.3	303.0	313.9	333.5	376.0	426.8	448.2	395.2	55- 60	179.5	1537	74.6,63.6
65	279.7	243.8	246.4	275.5	325.8	383.5	398.7	351.0	60- 65	165.5	1702	82.6,70.5
70	221.1	181.4	178.9	212.9	268.0	332.5	349.1	297.9	65- 70	143.9	1846	89.6,76.4
75	157.9	117.1	111.3	145.7	204.4	271.2	299.6	235.4	70- 75	116.8	1963	95.2,81.3
80	93.88	50.65	0	71.20	137.6	175.6	0	146.1	75- 80	74.75	2038	98.9,84.4
85	35.45	0	0	0	71.61	0	0	0	80- 85	21.18	2059	99.9,85.2
90	1.497	0	0	0	7.664	0	0	0	85- 90	2.193	2061	100,85.3
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 November 2024

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:5.640m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.07V I:1.846A P:44.42W PF:1.000 Lamp Flux:2415.63x1 lm		
NAME: LP-24-48x24-SP	TYPE:Basic LightPanel	WEIGHT:
SPEC.:FLS-1W4-3000K	DIM.: 48*24	SERIAL No.:01
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.02	1.02	1.02	.99	.99	.99	.95	.95	.95	.91	.91	.91	.87	.87	.87	.85
1.0	.88	.84	.81	.86	.83	.79	.82	.79	.77	.79	.77	.74	.76	.74	.72	.70
2.0	.76	.70	.64	.74	.68	.64	.71	.66	.62	.68	.64	.61	.66	.62	.59	.57
3.0	.66	.58	.52	.64	.57	.52	.62	.56	.51	.59	.54	.50	.57	.53	.49	.47
4.0	.58	.50	.44	.57	.49	.43	.54	.48	.43	.52	.47	.42	.50	.46	.42	.40
5.0	.51	.43	.37	.50	.43	.37	.48	.42	.36	.47	.41	.36	.45	.40	.36	.34
6.0	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.40	.35	.31	.29
7.0	.41	.33	.28	.41	.33	.28	.39	.32	.28	.38	.32	.27	.37	.31	.27	.25
8.0	.37	.30	.25	.37	.30	.25	.36	.29	.24	.35	.29	.24	.34	.28	.24	.22
9.0	.34	.27	.22	.34	.27	.22	.33	.26	.22	.32	.26	.22	.31	.26	.22	.20
10.0	.31	.24	.20	.31	.24	.20	.30	.24	.20	.29	.24	.20	.29	.23	.19	.18

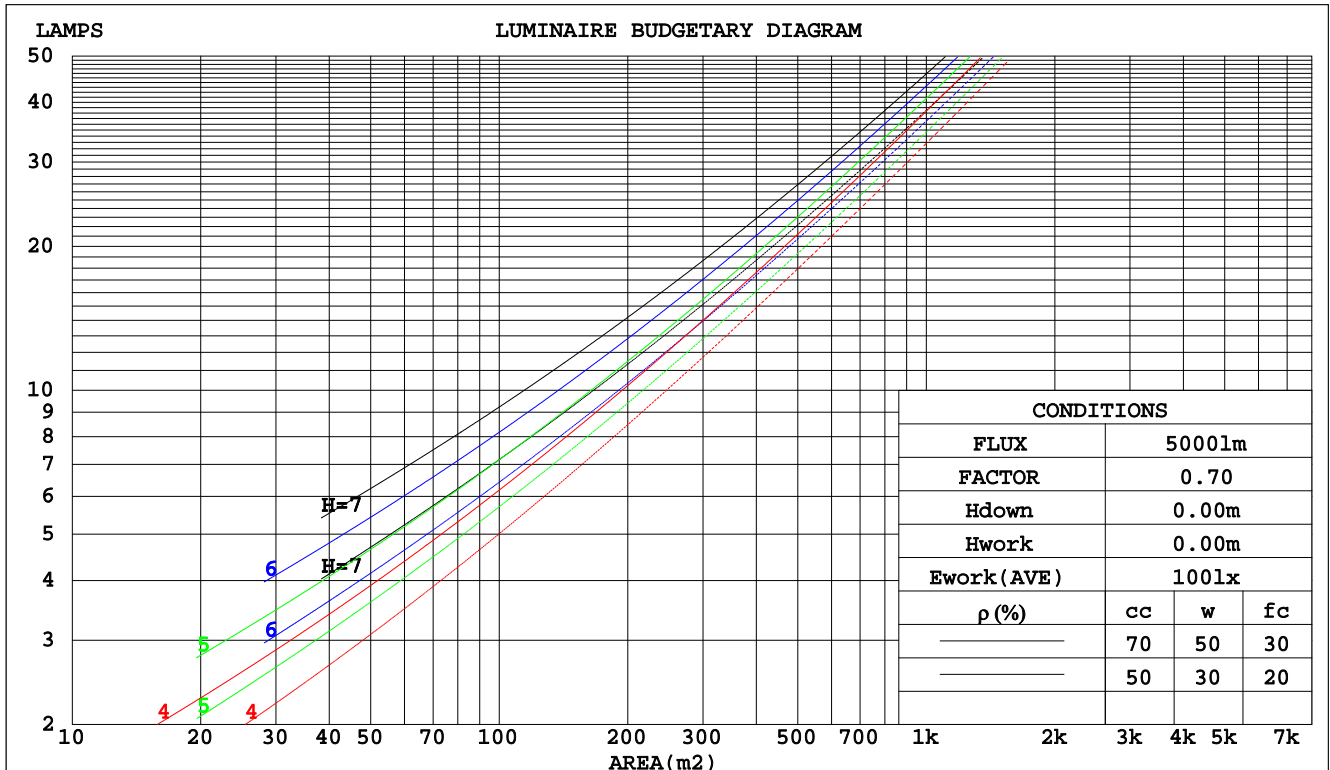

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 November 2024

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:5.640m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.07V I:1.846A P:44.42W PF:1.000 Lamp Flux:2415.63x1 lm		
NAME: LP-24-48x24-SP	TYPE:Basic LightPanel	WEIGHT:
SPEC.:FLS-1W4-3000K	DIM.: 48*24	SERIAL No.:01
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.277	.157	.050	.271	.154	.049	.259	.149	.047	.249	.143	.046	.239	.139	.045	
2.0	.263	.144	.044	.258	.142	.044	.247	.138	.043	.238	.134	.042	.229	.130	.041	
3.0	.243	.129	.039	.238	.128	.038	.229	.124	.038	.221	.121	.037	.213	.118	.037	
4.0	.224	.116	.034	.219	.115	.034	.211	.112	.033	.204	.109	.033	.197	.107	.033	
5.0	.206	.105	.030	.202	.104	.030	.195	.102	.030	.188	.099	.030	.182	.097	.029	
6.0	.190	.095	.027	.187	.094	.027	.180	.093	.027	.175	.091	.027	.169	.089	.026	
7.0	.176	.087	.025	.173	.086	.025	.168	.085	.024	.162	.083	.024	.157	.082	.024	
8.0	.164	.080	.023	.162	.080	.022	.157	.078	.022	.152	.077	.022	.147	.076	.022	
9.0	.153	.074	.021	.151	.074	.021	.147	.072	.021	.142	.071	.020	.138	.070	.020	
10.0	.144	.069	.019	.142	.069	.019	.138	.067	.019	.134	.066	.019	.130	.066	.019	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.163	.163	.163	.139	.139	.139	.095	.095	.095	.054	.054	.054	.017	.017	.017	
1.0	.155	.133	.114	.132	.114	.098	.091	.079	.068	.052	.045	.039	.017	.015	.013	
2.0	.149	.112	.082	.127	.097	.071	.087	.067	.049	.050	.039	.029	.016	.013	.009	
3.0	.143	.098	.062	.122	.084	.053	.084	.059	.037	.049	.034	.022	.016	.011	.007	
4.0	.137	.086	.048	.117	.075	.042	.081	.052	.029	.047	.030	.017	.015	.010	.006	
5.0	.130	.078	.039	.112	.067	.034	.077	.047	.024	.045	.028	.014	.014	.009	.005	
6.0	.124	.071	.032	.107	.061	.028	.074	.043	.020	.043	.025	.012	.014	.008	.004	
7.0	.118	.065	.027	.102	.056	.024	.070	.039	.017	.041	.023	.010	.013	.008	.003	
8.0	.112	.060	.024	.097	.052	.021	.067	.036	.015	.039	.022	.009	.013	.007	.003	
9.0	.107	.056	.021	.092	.048	.018	.064	.034	.013	.037	.020	.008	.012	.007	.003	
10.0	.102	.052	.019	.088	.045	.016	.061	.032	.012	.036	.019	.007	.012	.006	.002	

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:06 November 2024

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:5.640m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.07V I:1.846A P:44.42W PF:1.000 Lamp Flux:2415.63x1 lm										
NAME: LP-24-48x24-SP					TYPE:Basic LightPanel			WEIGHT:		
SPEC.:FLS-1W4-3000K					DIM.: 48*24			SERIAL No.:01		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.8	13.4	12.1	13.7	13.9	11.7	13.3	11.9	13.5	13.7
3H	13.5	15.0	13.8	15.3	15.5	13.1	14.5	13.4	14.8	15.0
4H	14.2	15.6	14.5	15.9	16.1	13.5	14.9	13.8	15.2	15.4
6H	14.7	16.0	15.0	16.3	16.6	13.5	14.8	13.8	15.1	15.4
8H	14.8	16.1	15.2	16.4	16.7	13.4	14.7	13.8	15.0	15.3
12H	14.9	16.1	15.2	16.4	16.7	13.4	14.6	13.8	14.9	15.2
4H 2H	12.4	13.8	12.7	14.1	14.3	12.3	13.7	12.6	13.9	14.2
3H	14.2	15.5	14.6	15.8	16.1	13.8	15.1	14.2	15.4	15.7
4H	15.0	16.1	15.4	16.5	16.8	14.3	15.5	14.7	15.8	16.1
6H	15.6	16.6	16.0	16.9	17.3	14.4	15.4	14.8	15.8	16.1
8H	15.7	16.7	16.1	17.0	17.4	14.4	15.3	14.8	15.7	16.0
12H	15.8	16.7	16.3	17.1	17.5	14.3	15.2	14.7	15.6	16.0
8H 4H	15.2	16.1	15.6	16.5	16.8	14.6	15.5	15.0	15.9	16.3
6H	15.8	16.6	16.2	17.0	17.4	14.6	15.4	15.1	15.8	16.3
8H	16.0	16.7	16.5	17.1	17.6	14.6	15.3	15.1	15.7	16.2
12H	16.1	16.7	16.6	17.2	17.7	14.6	15.2	15.1	15.6	16.1
12H 4H	15.1	16.0	15.5	16.4	16.8	14.6	15.4	15.0	15.8	16.2
6H	15.8	16.5	16.2	16.9	17.3	14.7	15.3	15.1	15.8	16.2
8H	16.0	16.6	16.5	17.0	17.5	14.6	15.2	15.1	15.7	16.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 2416 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.1)

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:06 November 2024

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:5.640m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.07V I:1.846A P:44.42W PF:1.000 Lamp Flux:2415.63x1 lm		
NAME: LP-24-48x24-SP	TYPE:Basic LightPanel	WEIGHT:
SPEC.:FLS-1W4-3000K	DIM.: 48*24	SERIAL No.:01
MFR.: EVERFINE	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	46	36	30	46	36	30	45	35	29	24
0.80	55	44	38	54	44	38	52	43	37	31
1.00	62	52	45	61	52	45	59	53	45	38
1.25	69	59	52	67	58	52	65	57	51	45
1.50	73	64	58	72	63	57	69	62	56	49
2.00	79	72	66	78	71	65	75	69	64	57
2.50	83	76	70	81	75	70	78	72	68	61
3.00	86	80	75	84	79	74	81	76	72	65
4.00	90	85	81	88	83	79	84	80	77	69
5.00	92	88	84	90	86	83	86	83	80	72
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:06 November 2024

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:5.640m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.07V I:1.846A P:44.42W PF:1.000 Lamp Flux:2415.63x1 lm		
NAME: LP-24-48x24-SP	TYPE:Basic LightPanel	WEIGHT:
SPEC.:FLS-1W4-3000K	DIM.: 48*24	SERIAL No.:01
MFR.: EVERFINE	SUR.:	Shielding Angle:

Conical surface Flux(90deg):

982.58 lm

%lum = 47.7%


%lamp = 40.7%

Conical surface Flux(120deg):

1536.9 lm

%lum = 74.6%

%lamp = 63.6%

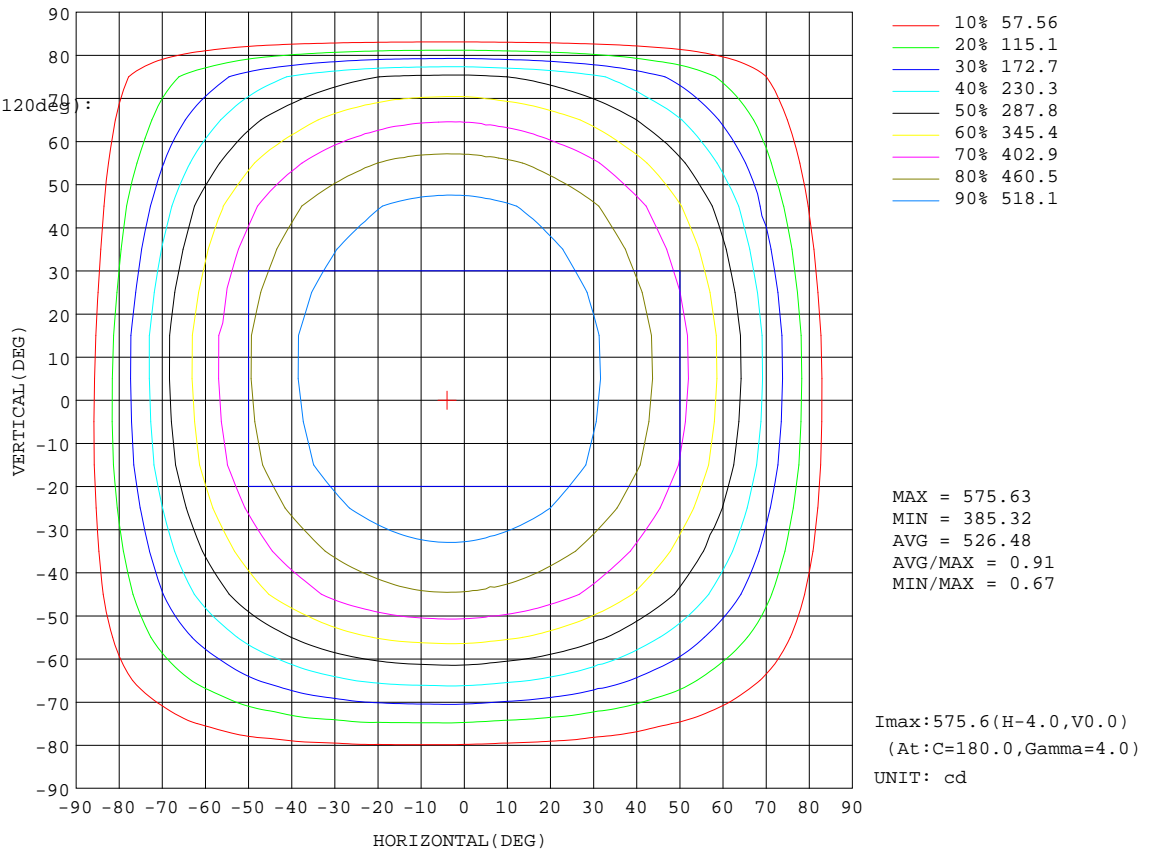


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:06 November 2024

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:5.640m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.07V I:1.846A P:44.42W PF:1.000 Lamp Flux:2415.63x1 lm		
NAME: LP-24-48x24-SP	TYPE:Basic LightPanel	WEIGHT:
SPEC.:FLS-1W4-3000K	DIM.: 48*24	SERIAL No.:01
MFR.: EVERFINE	SUR.:	Shielding Angle:

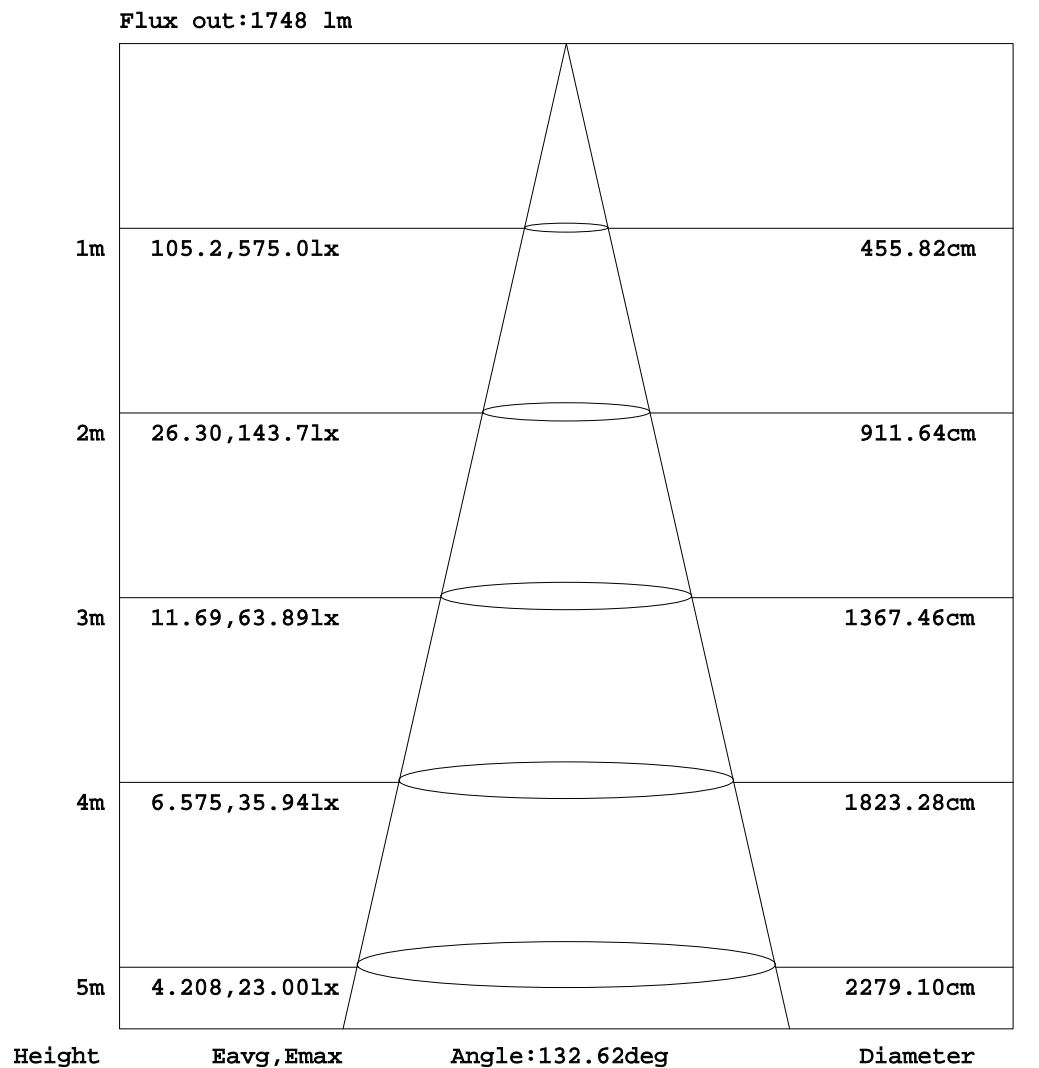


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 November 2024

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:5.640m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:24.07V I:1.846A P:44.42W PF:1.000 Lamp Flux:2415.63x1 lm		
NAME: LP-24-48x24-SP	TYPE:Basic LightPanel	WEIGHT:
SPEC.:FLS-1W4-3000K	DIM.: 48*24	SERIAL No.:01
MFR.: EVERFINE	SUR.:	Shielding Angle:

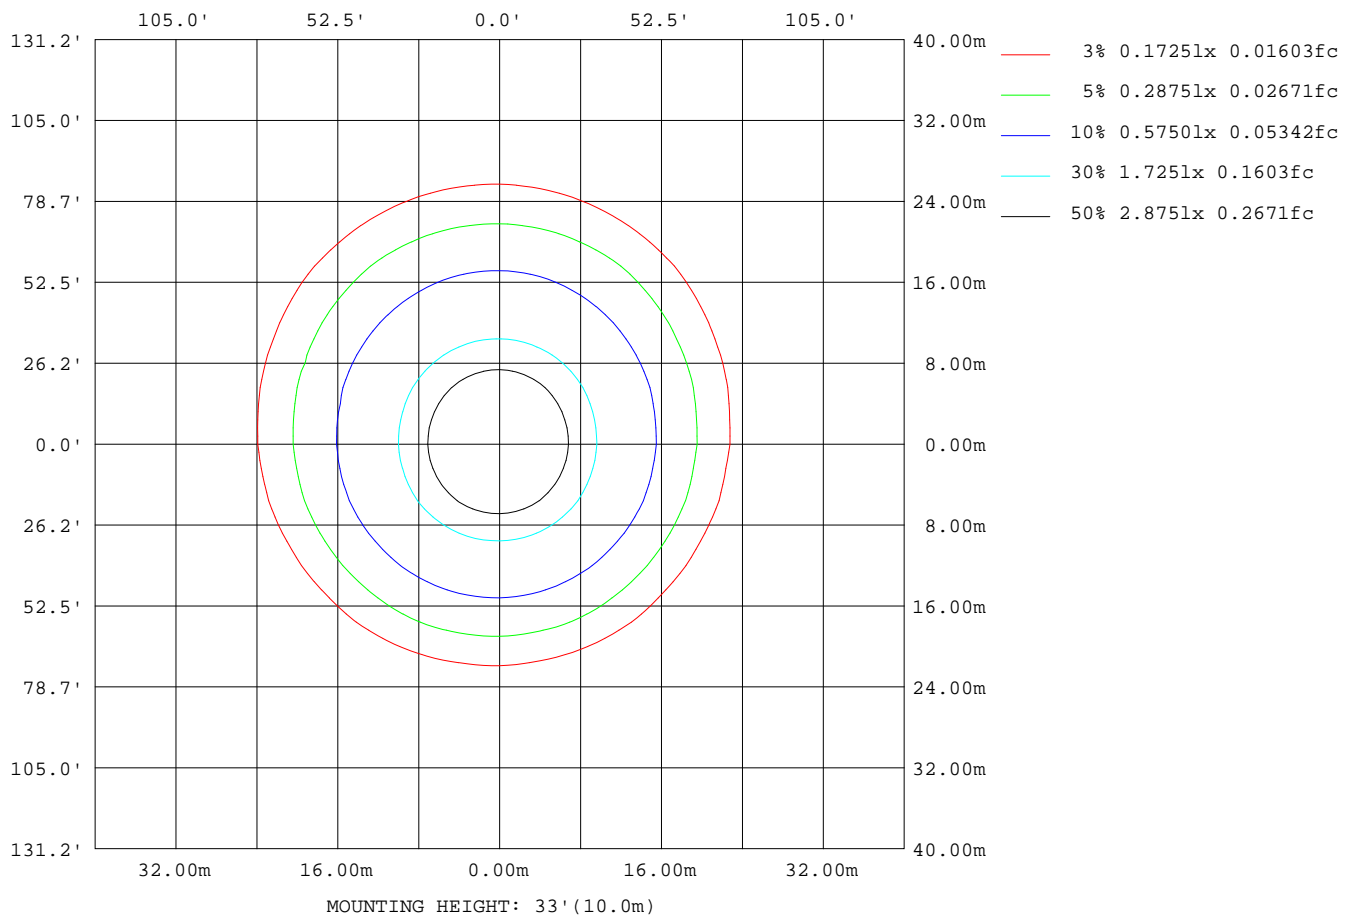

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:06 November 2024

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:5.640m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.07V I:1.846A P:44.42W PF:1.000 Lamp Flux:2415.63x1 lm		
NAME: LP-24-48x24-SP	TYPE:Basic LightPanel	WEIGHT:
SPEC.:FLS-1W4-3000K	DIM.: 48*24	SERIAL No.:01
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	858
L_0~180(75)av	838
L_0~180(85)av	736
L_90~270(65)av	914
L_90~270(75)av	951
L_90~270(85)av	0
L_45(65)av	888
L_45(75)av	890
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:06 November 2024

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:5.640m [K=1.0000]
Remarks:

Planar Illuminance Curve

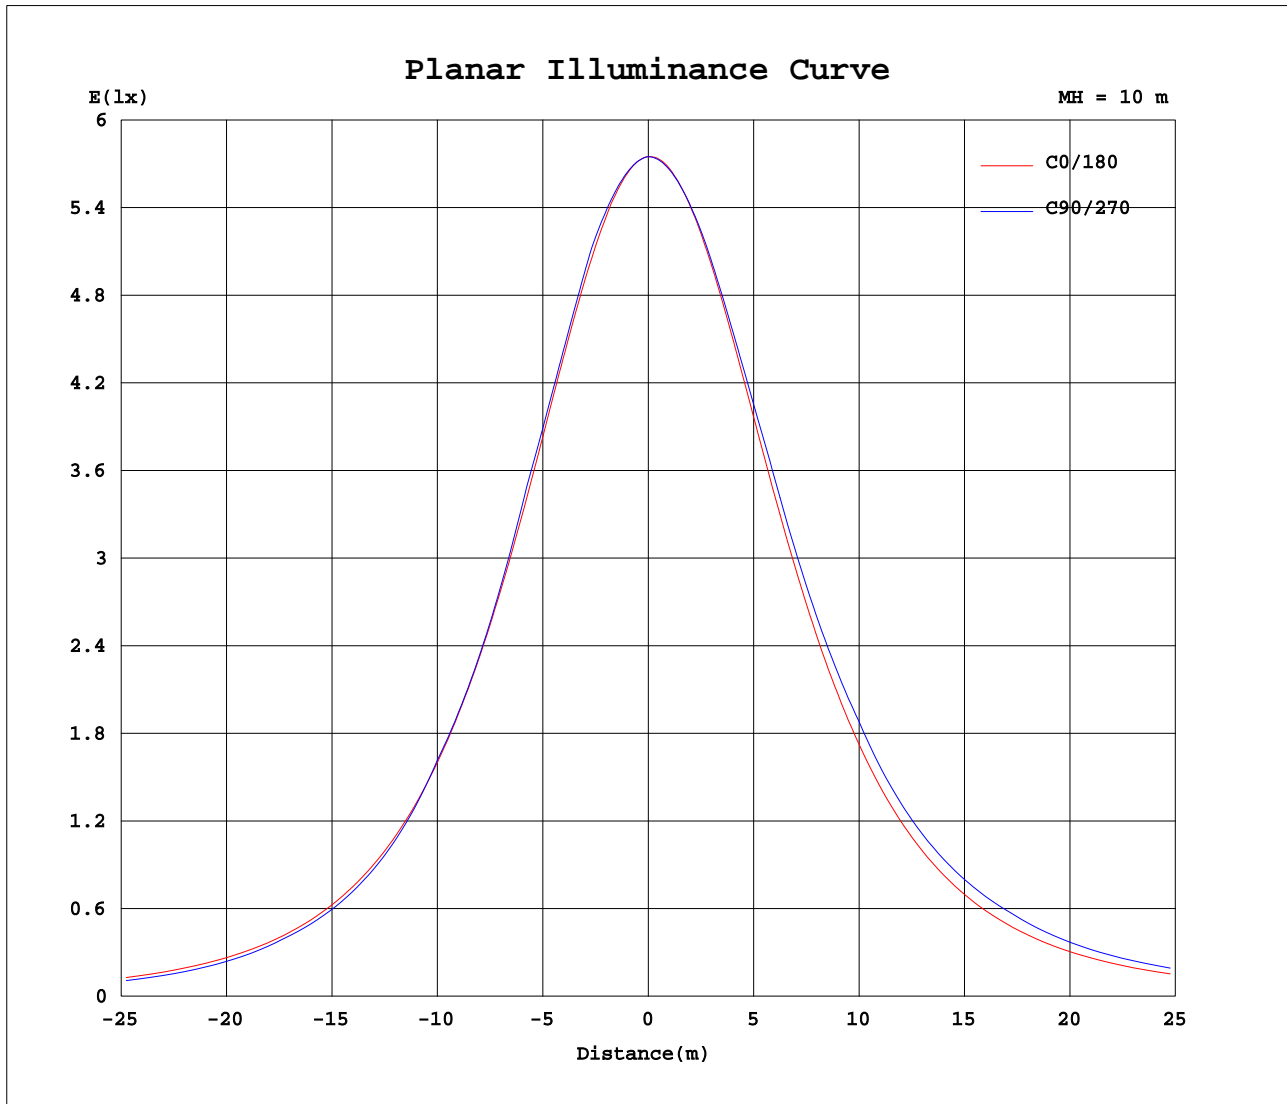

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 06 November 2024

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity: 65.0%
 Test Distance: 5.640m [K=1.0000]
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:5.640m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:5.640m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:5.640m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:5.640m [K=1.0000]
Remarks:

```