




# SHOWROOM PANEL

The **SHOWROOM PANEL** is specifically designed to impress, casting even and wide-ranging luminance down on cars, trucks, vans and other large objects. The **SHOWROOM PANEL** is an EOS 'complete solution,' meaning that it delivers at the job site to your spec, ready to be installed without any additional assembly, wiring or hassles.

This decorative lighting solution is both attractive and functional, with a maximum size of 10 feet by 20 feet (120" x 240"), and is constructed of an EOS FABRIK overlay with LEDs.

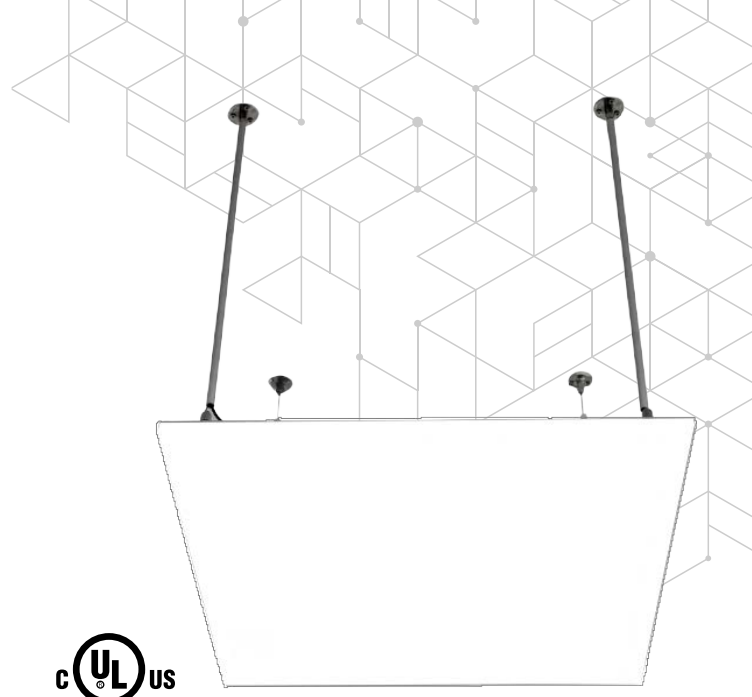

**Auto Dealerships**



**Custom Art Displays**



**Retail**




**Commercial Interior**




**Gallery Displays**

- White or Printed Stretch Fabric
- Dedicated White, Tunable White, RGB or RGBW
- **90+ CRI** Standard, Premium **95+ CRI** Available at Additional Cost
- Multiple Mounting options
- 24VDC
- Indoor Rated
- Max size: 10' x 20'; inquire for larger sizes

**Front View:**

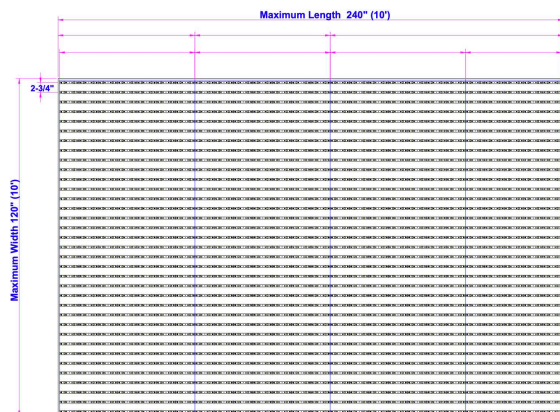


**Back View:**

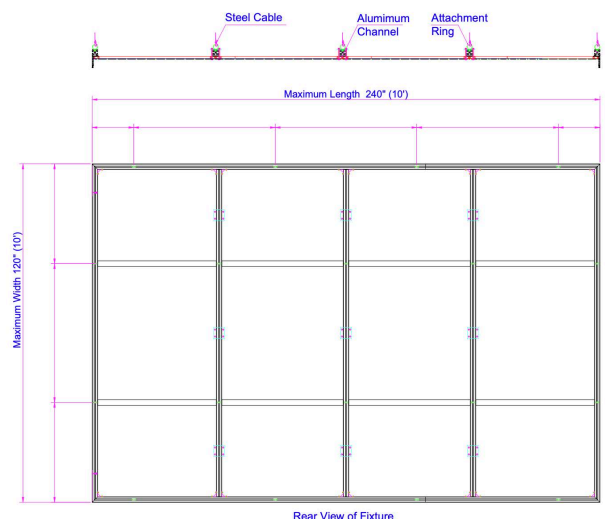




# SHOWROOM PANEL



## Installation methods:

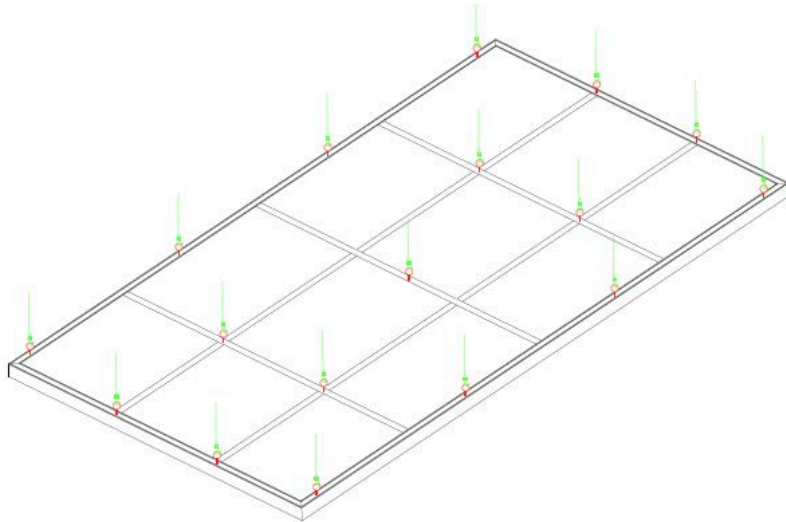

## Added Details:

- Thickness of 90mm (3.6") allows LEDs along the perimeter of the profile
- Standard trim is black powder coated aluminum; unfinished and custom color trim available
- These are lighter weight and larger in size; they would be better for display in large areas

## Nomenclature:

MODEL	VOLTAGE	DIMENSIONS TOP X SIDE (IN INCHES)	CRI	COLOR TEMP	POWER	MOUNTING	TRIM COLOR	FINISH	POWER SUPPLY
SWRM	24	C1x C2	90	2700K	SP	SM	AL	WSF	010V

**A MODEL**  
SWRM - Showroom Panel

**B VOLTAGE**  
24 - 24VDC (w/UNV 120-277 Driver)

**C DIMENSIONS**  
C1 - Top in Inches  
C2 - Side in Inches

**D CRI**  
90 - Basic (Standard)  
95 - Premium (Additional Cost)

**E COLOR TEMP**  
2400K - CCT    4000K - CCT  
2700K - CCT    6000K - CCT  
3000K - CCT    6500K - CCT  
3500K - CCT  
  
CT - Color Tuning (2400K to 6000K)

RGB27W - RGB + 2700K  
RGB30W - RGB + 3000K  
RGB35W - RGB + 3500K  
RGB40W - RGB + 4000K  
RGB60W - RGB + 6000K

**F POWER**  
SP - Standard Power

**G MOUNTING**  
SM - Surface Mount  
PM - Pendant Mount

**H TRIM COLOR**  
AL - Aluminum (Standard)  
BL - Black Powder Coat  
WH - White Powder Coat  
CS - Custom (Define RAL#)

**I FINISH**  
WSF - White Stretch Fabric  
PSF - Printed Stretch Fabric

**J POWER SUPPLY**  
010V - 0-10V  
ELV - Electronic Low Voltage  
DMX - DMX/DALI  
PI - Plug In  
DPI - Dimmable Plug In