




SKY LUMINAIRE

The **SKY LUMINAIRE** is designed to be a suspended fixture that functions as a custom sized Luminaire that can be tied into a standard T-Bar Ceiling System.

The **SKY LUMINAIRE** can be produced up to 78" x 39", and transforms rooms and interior spaces that are dark and that receive little to no daylight into restorative beautiful spaces.

With the optional second surface printed graphics EOS can provide, the **SKY LUMINAIRE** is more than capable of bringing a touch of nature in an otherwise enclosed room.

The **SKY LUMINAIRE** can be used to accommodate a large number of applications:

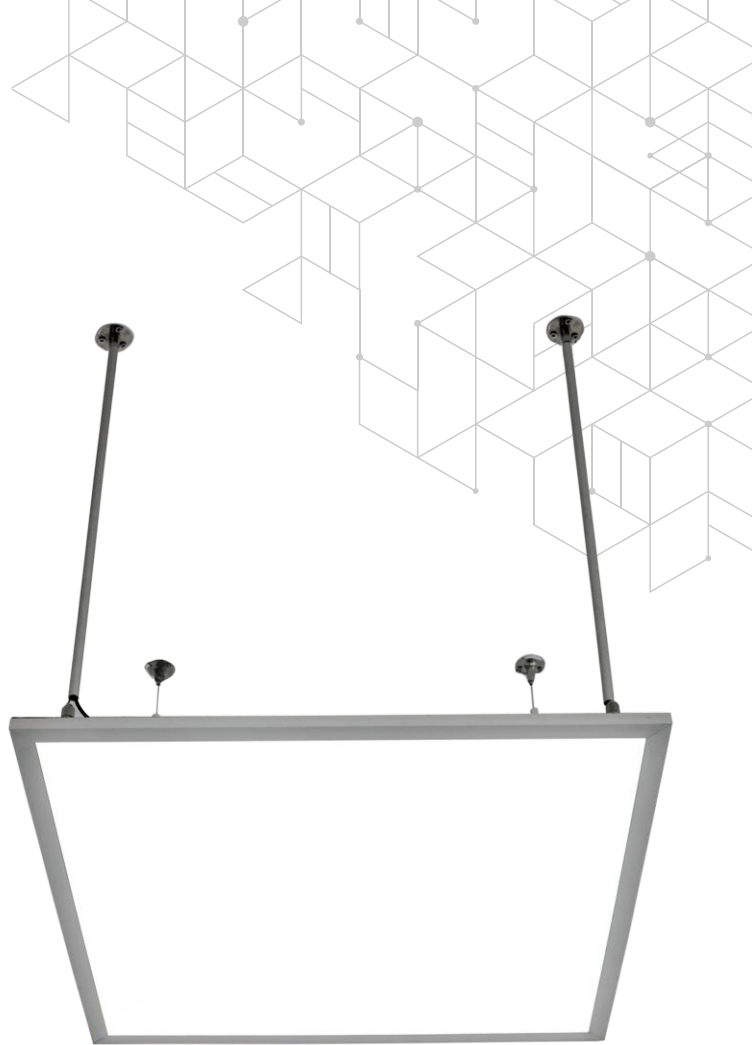

Branding



Residential



Signage



Restaurants



Custom Fixtures



Hospitality



Retail



Healthcare



Gallery Displays



Custom Art Displays




Custom Art Displays



Bar



Commercial Interior

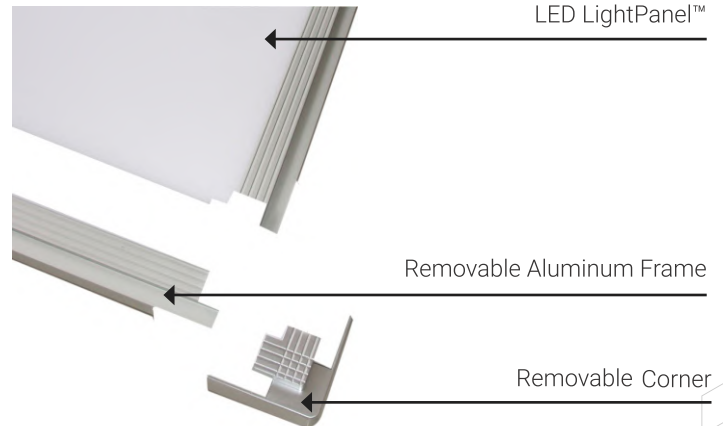

LED LightPanel™

Removable Aluminum Frame

Removable Corner



General Specifications

LIGHT WEB TECHNOLOGY™ :

3D etched patterns to evenly distribute light throughout the panel. Patterns available are GRID, DOT and MICRODOT™

THICKNESS:

5/8"

MAXIMUM SIZE AND PROPORTIONS:

78" x 39"

MINIMUM SIZE:

6" X 6"

POWER OPTIONS:

24VDC Standard and 24VDC High Power

DRIVER INPUT VOLTAGE :

100V TO 480V

LONG LIFE :

Over 50,000 hours = Nearly 12 years based on 12 hours a day. Once installed, the LightPanel System is virtually maintenance free.

WATTAGE :

4.3 W/Ft . -24V Standard Power (Optional: 12V)
5 W/ Ft. - 24V - High Power
*ask eos specialist for information on RGB, RGBW and Color Tuning options.

DIMMABLE :

The system is dimmable to <10% when matched with Dimmable Power Supplies

LEDs :

ANSI Binned LEDs from Tier 1 Suppliers
LED CRI > 80, 95+ Premium option
LED CRT - 1800K - 7500K, RGBW, UV

WIRE GAUGE:

20GA Wiring for White and Color Tuning Panels, 24GA for Color

SERVICE AND INSTALLATION :

Sky Luminaires come with standard keyhole surface mounts, optional suspension mounts are also available.

IP RATNG:

Indoor Rated

Optional Specifications



COMPATIBLE POWER SUPPLIES :

- 0-10V dimming • DMX/DALI
- Electronic low voltage (ELV)
- RF Dimmable Plug In
- Inline Dimmable Plug-In



OUTPUT OPTIONS:

24V Standard Power or 24V High Power available. 12V available upon request



COLOR TEMPERATURES :

- 1800K • 2400K • 2700K • 3000K
- 3500K • 4000K • 5000K
- 6000K • 6500K • 7500K
- UV (Ultraviolet) • RGBW

*formerly 5300K



APPROVALS AND CERTIFICATIONS:

The System is UL listed for Architectural applications and UL recognized for signage. All power supplies are UL / ETL listed.

<https://eoslight.com/user-guide/>



DOWNLOAD OUR USER GUIDE FOR WIRING & INSTALLATION INSTRUCTIONS





Product Specification Ordering Form

NAME:	PROJECT NAME:	ADDRESS:
PHONE:	PROJECT LOCATION:	CITY:
EMAIL:	ANTICIPATED DELIVERY DATE:	ZIP CODE:
COMPANY NAME:	PROJECT SPECIFIER:	RUSH PROJECT: <input type="checkbox"/> Yes <input type="checkbox"/> No

QTY	FIXTURE TYPE	VOLTAGE	DIMENSIONS (INCHES) TOP SIDE		LED SIDES	COLOR TEMP	LED POWER	CORD LENGTH	CORD LOCATION	CORD COLOR	POWER SUPPLY
5	SK	24V	48	50	4SL	2700	SP	CC6	TL	BC	HW

A FIXTURE TYPE

LUMINAIRE

SK - SKY LUMINAIRE

B VOLTAGE


24V - 24V (Standard)
12V - 12V (Optional)

C DIMENSIONS

(Generated by Client)

C1 - Top Dimension


C2 - Side Dimension

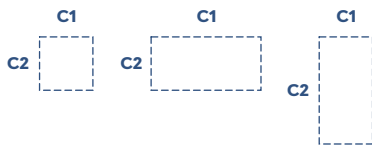

D LED SIDES

1SL - One Side
2SL - Two Sides
3SL - Three Sides
4SL - Four Sides

Top Dimension

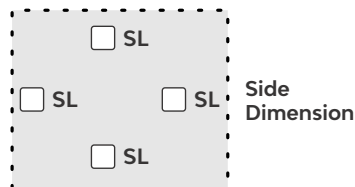

*Please note, the longest length is typically the LED side when selecting 1SL or 2SL

E COLOR TEMP


1800 - 1800K 6500 - 6500K
2400 - 2400K 7500 - 7500K
2700 - 2700K UV - Ultraviolet
3000 - 3000K RGBW - Color Changing
3500 - 3500K + White (6000K, 4000K,
4000 - 4000K 2700K)
5000 - 5000K
6000 - 6000K

F LED POWER

SP- Standard Power PSP- Premium Standard Power (95+ CRI)
HP- High Power PHP- Premium High Power (95+ CRI)

G POWER CORD LENGTH

SC - Standard -9.8 ft.
CC_ - Custom Length ____ ft



H POWER CORD EXIT

TL - Top Left Corner BL - Bottom Left Corner
TR - Top Right Corner BR - Bottom Right Corner
STL - Side Top Left Corner SBL - Side Bottom Left Corner
STR - Side Top Right Corner SBR - Side Bottom Right Corner

I POWER CORD COLOR

BC - Black WC - White

J POWER SUPPLY INFO

010V - 010V Dimmable Hardwire
ELV - Electronic Low Voltage Dimmable Hardwire
DMX - DMX /DALI
PI - Plug In, DC Jack
DPI - Dimmable Plug in w/ remote
HW - Non-Dimmable Hardwired

