



Retail
Hospitality
Healthcare
Architectural Lighting
Signage
Casino Design
Residential

eoslight.com


LUMINAIRE PHOTOMETRIC TEST REPORT

4000k-24 x 24-SP-4SL_IESNA95


NAME: LP-24V-24x24-4000-ASL-SP	TYPE: EOS Light Panel	WEIGHT:1500G
SPEC.:	DIM.:	SERIAL No.:
MFR.: EOS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 53.35 lm/W
MODEL		Imax(cd)	438.6	S/MH(C0/180)	1.47	
NOMINAL POWER(W)	30	LOR(%)	107.1	S/MH(C90/270)	1.51	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1685.2	η UP,DN(C0-180)	0.0,51.4	
NOMINAL FLUX(lm)	1572.81	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,55.7	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24.14	η down(%)	107.1	CIBSE SHR MAX	1.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

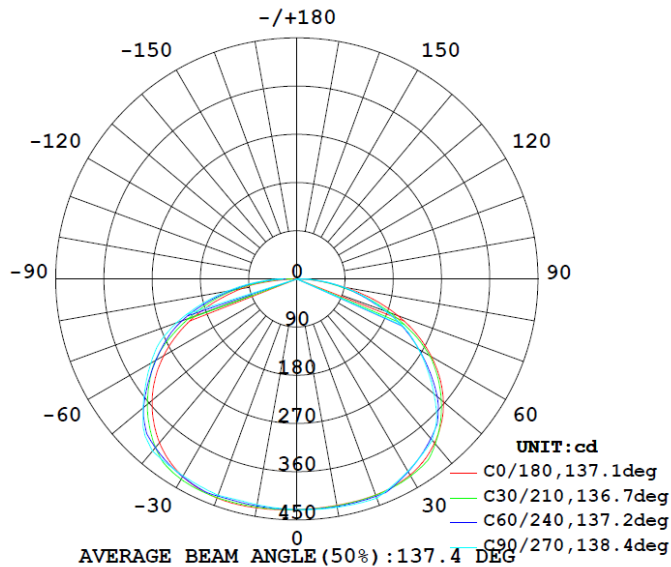

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

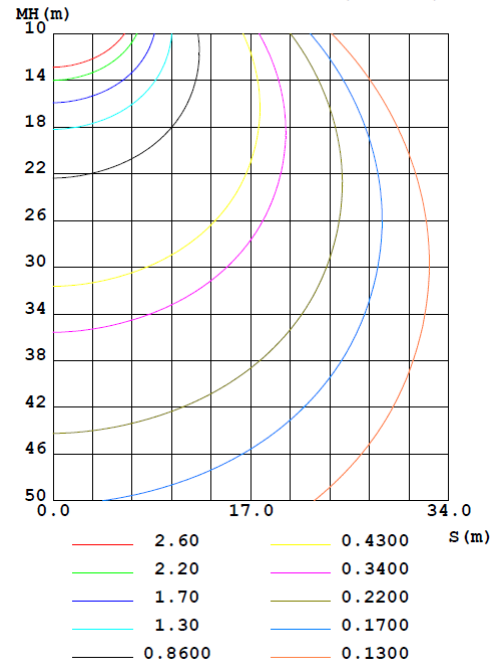

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-25

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity: 65.0%
Test Distance: 9.180m [K=1.0000]
Remarks: DWY




Retail
Hospitality
Healthcare
Architectural Lighting
Signage
Casino Design
Residential

eoslight.com

AAI Figure

NAME: LP-24V-24x24-4000-ASL-SP	TYPE: EOS Light Panel	WEIGHT:1500G
SPEC.:	DIM.:	SERIAL No.:
MFR.:EOS	SUR.:	Shielding Angle:

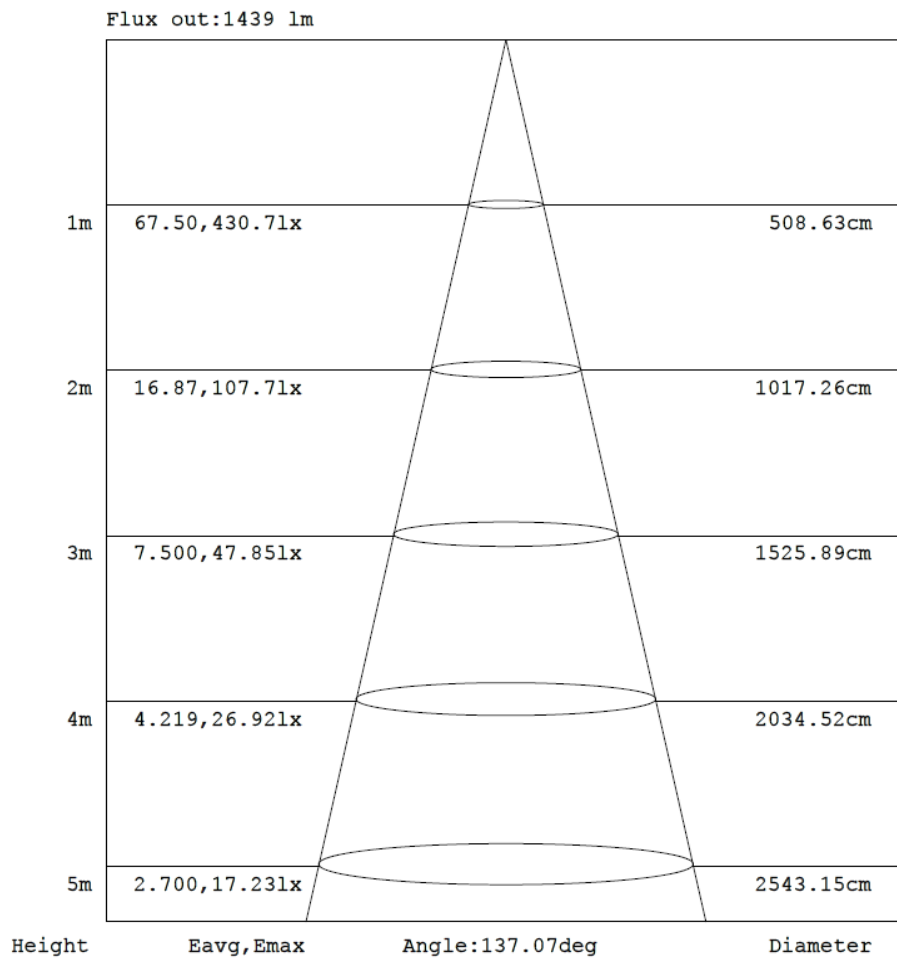

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-25

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity: 65.0%
Test Distance: 9.180m [K=1.0000]
Remarks: DWY





γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity: 65.0%
Test Distance: 9.180m [K=1.0000]
Remarks: DWY



γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity: 65.0%
Test Distance: 9.180m [K=1.0000]
Remarks: DWY



γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity: 65.0%
Test Distance: 9.180m [K=1.0000]
Remarks: DWY